


WORKING RANGES

(1) Bucket work

Maximum bucket loading capacity: 200kg (Bucket)

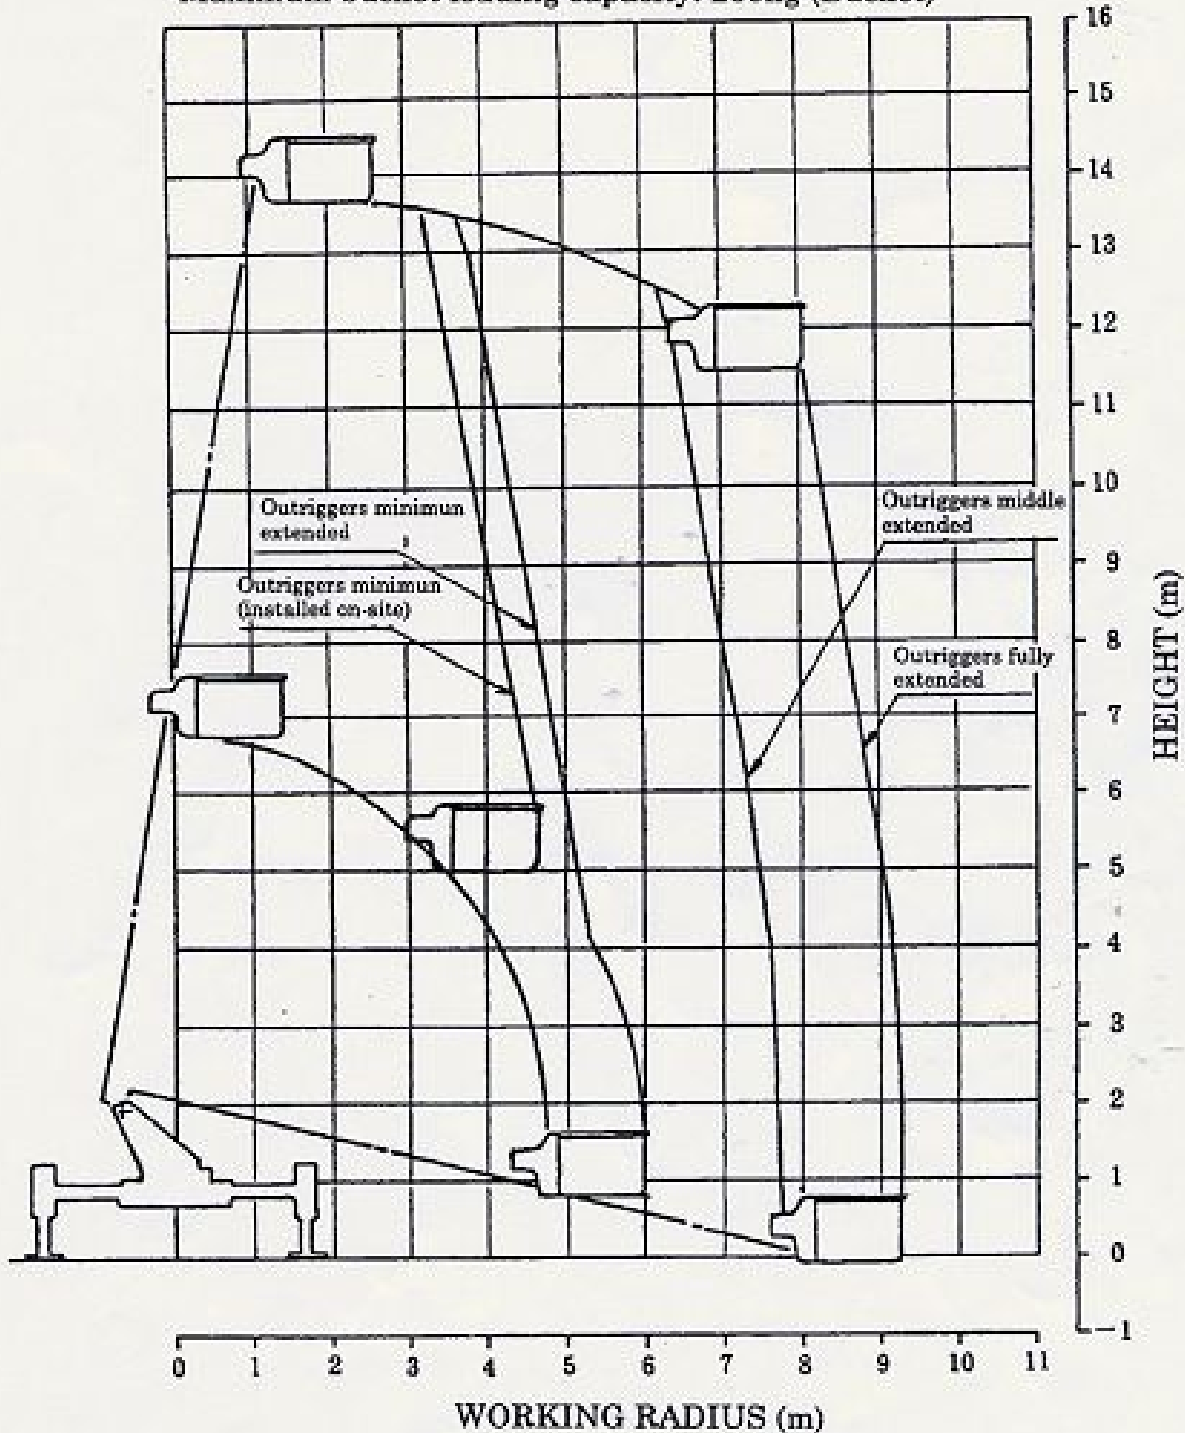

NOTES:

1. The working range is based on the condition that the outriggers are installed on firm and level surface.
2. The above figure indicates the working range to the sides. The working ranges toward the front and rear are the same as the working range when the outrigger is fully extended.
3. The deflection of the boom is not incorporated in the above figure.

